1 Publication number:

0 100 118 A1

4	2
U	Z

EUROPEAN PATENT APPLICATION

_	Application number: 83201038.3
(21)	Application number: 002010

22) Date of filing: 13.07.83

(a) Int. Cl.³: **C 07 C 43/13**, C 07 C 41/05 // B01J29/02, C01B33/20

30 Priority: 28.07.82 IT 2260582

(T) Applicant: ANIC S.p.A., Via Ruggero Settimo, 55, I-90139 Palermo (IT)

Date of publication of application: 08.02.84 Bulletin 84/6 Inventor: Neri, Carlo, Via Europa 32, I-20097 S.Donato Milanese (Milan) (IT) Inventor: Buonomo, Franco, Via Trento 4, I-20097 S.Donato Milanese (Milan) (IT) Inventor: Anfossi, Bartolomeo, Via Ravenna 54, I-20139 Milan (IT)

Ø Designated Contracting States: AT BE CH DE FR GB LI LU NL SE (14) Representative: Roggero, Serglo et al, Ing. Barzanò & Zanardo Milano S.p.A. Via Borgonuovo 10, 1-20121 Milano (IT)

Process for the synthesis of glycol monomethylethers.

A process for the synthesis of glycol monomethylethers consisting of reacting an olefin compound, methanol and hydrogen peroxide in aqueous solution in the presence of synthetic zeolites containing titanium atoms, of general formula:

xTiO2.(1-x)SiO2.

where x lies between 0.0001 and 0.04

EP 0 100 118 A1

This invention relates to a process for the synthesis of glycol monomethylethers in which the synthesis reaction is carried out in a single stage.

- It is known to prepare glycol monomethylethers by reacting an epoxide with methanol, using an acid as catalyst.
 - These preparation methods have the drawback of requiring several reaction stages.
- We have now surprisingly found that a synthetic zeolite containing
 titanium atoms is able to cause an olefin, methanol and hydrogen
 peroxide to react together in aqueous solution in a single stage,
 to give monomethylethers.
 - The subject matter of the present invention is a process for the synthesis of glycol monomethylethers consisting of reacting an
- olefinic compound, methanol and hydrogen peroxide in aqueous solution in the presence of synthetic zeolites containing titanium atoms (titanium silicalites), of the following general formula:

 xTiO 2. (1-x)SiO2,

where x lies between 0.0001 and 0.04.

The synthetic seolites used for the epoxidation reaction are described in Belgian patent 886,812, of which we repeat some points illustrating the material and relative method of preparation.

The composition range of the titanium silicalite expressed in terms of molar ratios of the reagents is as follows:

	Of morar radian		preferably
25	Molar ratio of reagents		·
	ean /740	5-200	35–65
	sio ₂ /Tio ₂	0.1-1.0	0.3-0.6
	OH /SiO2	0.1 1.0	60-100
	H ₂ 0/SiO ₂	20-200	00 200
	4 4		



_ Z _

0.0-0.5 Me/SiO2 0.4 - 1.00.1-2.0 RN /S10,

RN indicates the nitrogenated organic cation deriving from the organic base used for the preparation of the titanium silicalite

(TS-1).5

Me is an alkaline ion, preferably Na or K.

The final TS-1 has a composition satisfying the formula $xTiO_2 \cdot (1-x)SiO_2$, where x lies between 0.0001 and 0.04, and preferably between 0.01 and 0.025. The TS-1 is of the silicalite type, and

all the titanium substitutes the silicon. 10

The synthetic material has characteristics which are shown up by X-ray and infrared examination.

The X-ray examination is carried out by means of a powder diffractometer provided with an electronic pulse counting system, using the radiation CuKd. The titanium silicalites (TS-1) are characterised by a X-ray diffraction spectrum as shown in Figure 1b. This spectrum is similar overall to the typical spectrum of silicalite (Figure 1a), however it has certain clearly "single" reflections where double reflections are evident in the pure silicalite spectrum.

Because the spectral differences between TS-1 and silicalite are . 20 relatively small, special accuracy is required in the spectral determination. For this reason TS-1 and silicalite were examined by the same apparatus, using $^{A1}_{2}^{0}$ as the internal standard. Table 1 shows the most significant spectral data of a TS-1 where x = 0.017, and of a pure silicalite.

The constants of the elementary crystalline cell were determined by the minimum square method, on the basis of the interplanar distances f 7-8 single reflections lying within the range of

10-40° 20.

5

15

A large proportion of the interplanar distances of TS-1 are tendentially greater than the corresponding distances of pure silicalite, although only slightly, which is in accordance with the larger predictable value of the Ti-0 bond distance relative to that of the Si-0 bond distance.

Passage from a double reflection to a single reflection is interpreted as a change from a monoclinic symmetry (pseudo orthorhombic)

(silicalite) to an effective orthorhombic symmetry, "titanium

10 silicalite" (TS-1). In Figure 1, the most apparent aforesaid spectral differences are indicated by arrows.

INFRARED EXAMINATION. TS-1 shows a characteristic absorption band at about 950 cm⁻¹ (see Figure 2, spectra B, C and D) which is not present in the pure silicalite spectrum (Figure 2, spectrum A), and is also absent in titanium oxides (rutile, anastase) and in alkaline titanates.

Spectrum B is that of TS-1 with 5 mol% of TiO_2 , spectrum C is that of TS-1 with 8 mol% of TiO_2 , and spectrum D is that of TS-1 with 2.3 mol% of TiO_2 .

As can be seen from Figure 2, the band intensity at approximately

-1

950 cm increases with the quantity of titanium which substitutes
the silicon in the silicalite structure.

MORPHOLOGY. From a morphological aspect, TS-1 is in the form of parallelepipeds with chamfered edges. A X-ray microprobe examination

25 has shown that the titanium distribution within the crystal is

perfectly uniform, thus confirming that the titanium substitutes

the silicon in the silicalite structure, and is not present in other

forms.

The process for preparing titanium silicalite comprises the preparation of a reaction mixture consisting of sources of silicon oxide, titanium oxide and possibly an alkaline oxide, a nitrogenated organic

base and water, the composition in terms of the molar reagent ratios being as heretofore defined.

The silicon oxide source can be a tetraalkylorthosilicate, preferably tetraethylorthosilicate, or simply a silicate in colloidal form, or again a silicate of an alkaline metal, preferably Na or K.

The titanium oxide source is a hydrolysable titanium compound preferably chosen from TiCl₄, TiOCl₂ and Ti(alkoxy)₄, preferably Ti(OC₂H₅)₄.

The organic base is tetraalkylammonium hydroxide, and in particular tetrapropylammonium hydroxide.

- The reagent mixture is subjected to hydrothermal treatment in an autoclave at a temperature of between 130 and 200°C under its own developed pressure, for a time of 6-30 days until the crystals of the TS-1 precursor are formed. These are separated from the mother solution, carefully washed with water and dried. When in the
- 20 anhydrous state they have the following composition: +
 xTiO₂.(1-x)SiO₂. 0.04(RN)₂0.

The precursor crystals are heated for between 1 and 72 hours in air at 550°C to completely eliminate the nitrogenated organic base. The final TS-1 has the following composition:

25 xTiO₂.(1-x)SiO₂, where x is as heretofore defined.

Chemical and physical examinations are carried out on the products thus obtained.

The glycol monomethylether synth sis reaction is as follows: $R-CH-CH-R'+H_2O_2+CH_3OH\longrightarrow R-CH-CH-R'+H_2O$ OH OCH₃

where R and R', which can be the same or different, can be H, or an alkyl, aryl, alkylaryl, cycloalkyl or alkylcycloalkyl radical.

The methanol can be replaced by another alcohol.

The products obtained can be used as solvents, as intermediates or as "solutizers" for methanol in petrols.

The optimum reaction temperature is between 50 and 150°C, and

10 preferably about 100°C. At lower temperatures more epoxide and less ether are obtained. The pressure is that suitable for maintaining the olefin compound dissolved in the methanol.

The reactions can also be carried out with H_2O_2 in aqueous solution at low concentration (10-70% w/v).

15 By way of example, the olefins which can be used for the synthesis of glycol monomethylethers by this process are ethylene, propylene, butene-1, cis butene-2, trans butene-2 and isobutene.

Some examples are given hereinafter in order to better illustrate the invention, but these are not to be taken as limitative thereof

. 20 in any way.

EXAMPLES 1-6

100 cc of methanol, 3 g of catalyst and 50 g of olefin are fed into a 250 cc stainless steel autoclave fitted with a magnetic stirrer, an inlet for feeding the reagents and a dip tube for solution

25 withdrawal.

The autoclave is immersed in a bath temperature-controlled at 100° C, and, using a metering pump, a quantity of 36% w/v $_{2}^{\circ}$ 0 is fed equal

to 60 mol% of theolefin. The progress of the reaction with time is followed by withdrawing samples of the $\rm H_2O_2$ and titrating. When $\rm H_2O_2$ is no longer present, the reaction is interrupted and the products are analysed by chromatograph.

The results are given in Table 2. The same reactions can be carried out with the catalyst on a fixed bed by pumping the olefin/methanol solution and the H_2O_2 solution using two metering pumps which are preset such that the molar H_2O_2 /olefin ratio is about 0.6.

10 EXAMPLES 7-10

In order to demonstrate that dilution of the H₂O₂ with water is not essential for the purposes of the reaction according to the invention, tests were carried out under the conditions of Examples 1-6, using butene-2 and propylene with 10% w/v and 70% w/v H₂O₂, and maintaining the feed ratio unaltered at 60%.

. The results are shown in Table 3.

TABLE 1 Silicalite TS - 1 2 **W**. (b) Inter-28 Rel. Int. Inter-.(Cuko) planar planar. (Cuka) distance d(A) distance d(A) ٧s 11.14 7.94 11,14 VS 7.94 9.99 \$ 8,85 9,99 8 8.85 m 9,74 9,08 9.74 m 9.08 6.687 W 13.24 6.702 w . 13.21 13,95 6.348 mw 13,92 6,362 mw 14,78 5,993 mw 5.993 mw 14,78 "W# 5,698 15.55 5.698 w 15.55 ¥ 5,574 15,90 5,574 w 15.90 5.025 w 17,65 17,65 5.025 4.975 v 17.83 4.980 w. 17.81 W 20.39 4.355 w 20,37 4,360 4.255 mw 20.87 4,260 mw 20,85 8 23.08 3.853 3.855 s 23,07 ms 3.821 23,28 23.29 3.819 s 23,37 3,806 em 23.71 3,753 ៣៩ 3.751 23,72 ms 3.739 23,80 23,94 3.717 5 3.72Q

23,92

	•	•				
		•		24.35	3,655	mw .
24.41	3,646	æ			•	
•				24,60	3,619	mw
		•		25,84	3,448	·
25.87	3.444	w .				. •
				25.97	3.431	w .
26.87	3.318	w*		26.95	3,308	w*
	•			29.23	3,055	W.
29.27	3.051	mw	•			
				29.45	3,033	٧
29.90	2.988	mw	÷, 1	59.90	2,988	mw
30.34	2,946	w	:	30.25	2.954	. w
45,00	2,014	mw*		45.05	2,012	mw*
45,49	1,994	mw*		45.60	1,989	mw*

- a) Prepared by the method of U.S. Patent 4,061,724; product calcined at 550°C.
- b) vs: very strong; s: strong; ms: medium-strong; m: medium; mw: medium-weak; w: weak; *: multiplet.

N	
ta	
Н	
2	
F	

Ex. No.	OLEFIN	TIME	H ₂ O ₂ CONVERSION	ETHER	OTHERS
1	ethylene	0.5	100	98.5	The remainder to 100%
7	propylene	0.5	:	66°3	consists of small quantities
m	butene-1	.	\$	9**6	of epoxide which can be
4	cis butene-2	H	\$	96.8	recycled to the reaction
ın	trans butene-2	_F -1	*	95.4	
· »C	. 1sobutene	0.8	£	99.2	The ether yield is
					represented by:
		•			moles of ether formed x 100

TABLE

		O H	TIME	H,O, CONVERSION	ETHER	OTHERS
Ex. No.	OLERIN	1,2,2	hours	3°. V	TELD	
		. /w e/				
		Q.	ام	100	93.8	The remainder to 100%
`	purener	3		1	1	sonsists of small quantities
c	2-6004.4	70		100	0.0	כמומים כי כיינים
0	on rette			•	9 00	of apoxide which can be
c	ana lunom	10	0.5	100	0 N	
N	The Card			Ç Ç	5.86	recycled to the reaction
10	propylene	. 02	n. 0	007) }	


1. A process for the synthesis of glycol monomethyl ethers, characterised by reacting together an olefin compound, methanol and hydrogen peroxide in aqueous solution, in the presence of synthetic zeolites containing titanium atoms, of general formula:


 $xTiO_2 \cdot (1-x)SiO_2$


where x lies between 0.0001 and 0.04.

5

- 2. A process as claimed in claim 1, characterised in that the reaction is carried out at a temperature of between 50 and 150°C.
- 10 3. A process as claimed in claim 1, wherein the hydrogen peroxide is in dilute aqueous solution.
 - 4. A process as claimed in claim 1, wherein the hydrogen peroxide in the aqueous solution is between 10 and 70% w/v.
- 5. A process as claimed in claim 1, wherein the olefin compound 15 is chosen from ethylene, propylene, butene-1, cis butene-2, trans butene-2 and isobutene.

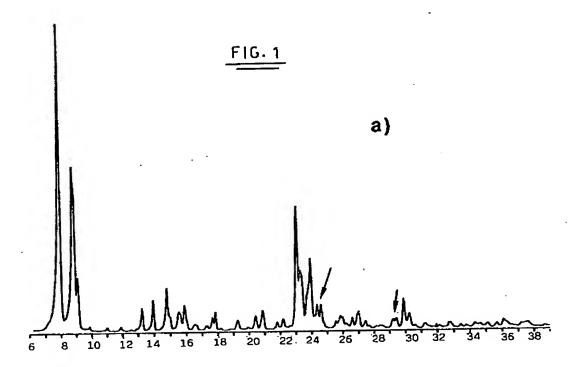

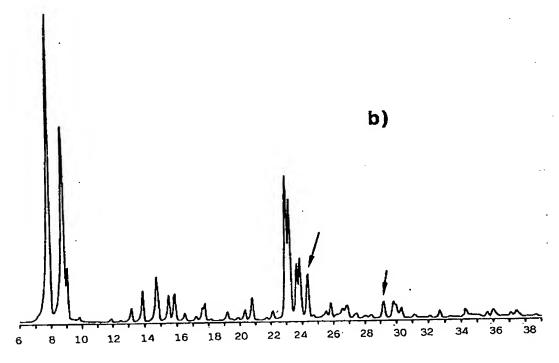

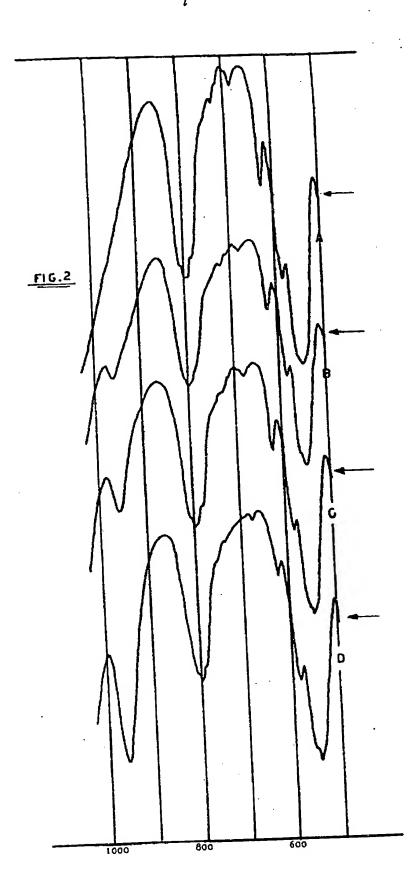



EUROPEAN SEARCH REPORT

 $0\,100\,118_{\text{Application number}}$

W 17

EP 83 20 1038

	DOCUMENTS CONSID	ERED TO BE RELEVANT					1
Category		dication, where appropriate,	Rele to c	- 400-1	CLASSIFICATION APPLICATION	ON OF THE (int. CL ³)	
ж	US-A-2 808 442 (al.) * Columns 1-4; ex		1-	5	C 07 C B 01 J	43/13 41/05 29/02 33/20	//
A	FR-A-2 471 950 (* Claim 1; page 5 6, line 2; example	5, line 14 - page	1-	5			
							
					TECHNICA SEARCHEI	L FIELDS O (Int. Cl. ³)	1
					C 07 (C 41/00 C 43/00	0
	·						
						:	
	The present search report has b	een drawn up for all claims					
-	Place of search THE HAGUE	Date of completion of the search 13-10-1983			Examine TI M.W.		
40 V AX	CATEGORY OF CITED DOCL particularly relevant if taken alone particularly relevant if combined w document of the same category technological background non-written disclosure intermediate document	UMENTS T: theory E: earlier after th Uth another D: docum L: docum A: membe docum	er of the	iple under locument, date d in the ap d for other	lying the Invertible to the published pilication reasons and family, cor	ntion i on, r responding	-